

# Product Reference WEDA 30 (50 Hz)

## Electric submersible pump

### Specifications

Portable electric submersible pump for dewatering of construction sites, mines, flooded areas etc. Designed for handling liquid with abrasive particles. Prot class IP68

### Pump Types

WEDA 30N Medium head, single-phase or 3-phase  
WEDA 30L Low head/High volume, single-phase or 3-phase

### Electric Motor

Single-phase squirrel cage induction motor with built-in capacitor and contactor.

3-phase: Squirrel cage induction motor with built-in contactor.  
Insulation: Class F (+155C), IEC 85

Data	WEDA 30L/N	1~	3~
Rated Output	kW	2.0	2.0
Rated Current A	230v	12.0	7.3
	400v		4.5
	500v		3.5
Shaft speed	rpm	2900	2900

Other voltage upon request

### Motor Protection

Thermal switch in each winding (+130 degree C)

### Cable

Oil and wear resistant rubber cable type HO7RN-F

1~: 15m 3 x 2.5 mm<sup>2</sup>

3~: 15m 4 x 1.5 mm<sup>2</sup>

### Shaft Seal

Double seals with oil compartment

Primary seal: Silicon carbide against silicon carbide.

Secondary seal: Lip seal against wear sleeve.

### Bearings

Single-row ball bearing with C3 clearance.

### Materials

Castings:	Aluminium
Outer-casing:	Aluminium
Shaft:	Stainless steel
Fasteners:	Stainless steel
Impeller:	Cr-alloyed white cast iron
Wear parts:	Nitrile rubber

### Discharge connection


3" std, 4" opt, hose, BSP or NPT

### Accessories

- Low suction collar
- Float switch
- Zinc anodes
- Stainless steel strainer
- Epoxy coating
- Quick coupling type 1, 2,5"




Weight : 20 kg  
Max. solid size : 7mm

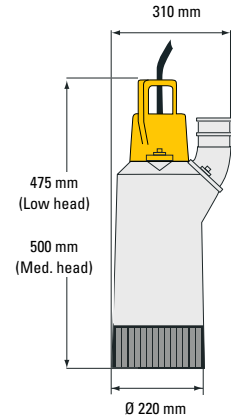

Dimensions (mm)


### Power (kW)

According to ISO 9906 - ANNEX A

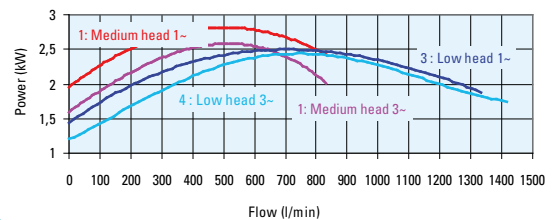

### Flow Chart

According to ISO 9906 - ANNEX A

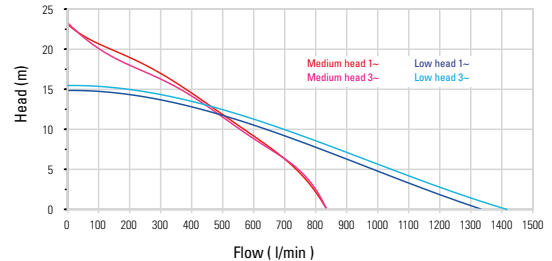

### Features

- Robust design
- Lightweight and user friendly
- Wear resistant wet end in CR-alloy steel and natural rubber
- Adjustable wear parts
- Built-in capacitor and contactor
- Easy installation

### Designed for

- Heavy duty pumping of abrasive liquids.
- Max submersible depth of 20m.
- Max temperature of liquid +40C.
- Max density of liquid, 1.100kg/m<sup>3</sup>.
- pH of the liquid between 5-8.
- For special applications contact Weda pump.

